


HAVE YOU HEARD THE BUZZ?

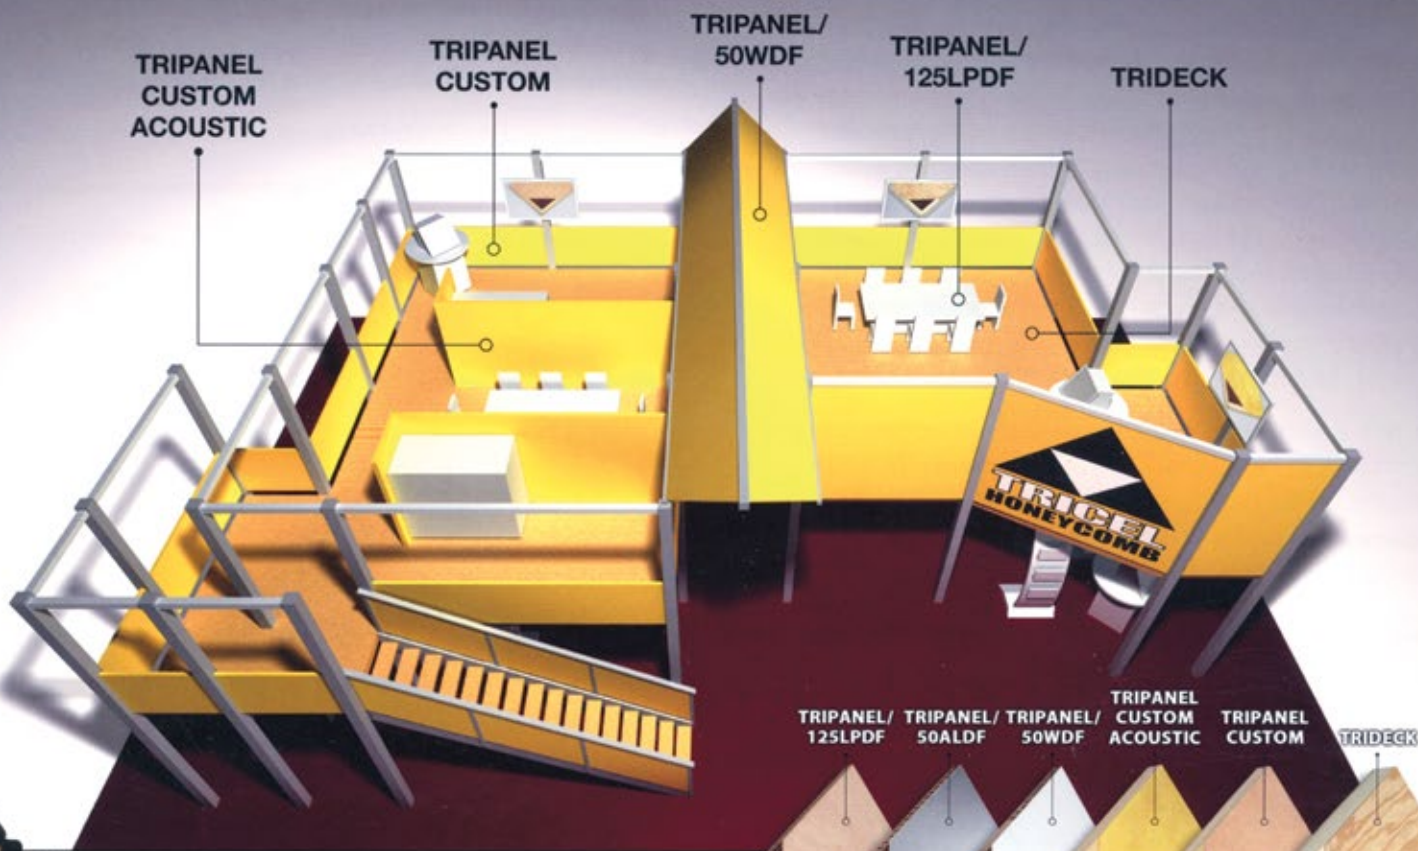

After 25 years, Tricel Honeycomb panel products are still the lightest and strongest in the industry.

Tricel Honeycomb panel products feature the highest rigidity and strength-to-weight ratio in the industry. TRIPANEL/CUSTOM is a component of an exceptionally versatile system suitable for **painting, fabric covering, laminating, wall papering** or **carpeting** on both sides. TRIDECK is Tricel Honeycomb laminated to A-C plywood with a 2-1/2" lumber surround, specifically designed for **double-deck exhibit flooring** and **risers/platforms**.

Let your creativity and the success of your booth design soar with TRIPANEL/CUSTOM and TRIDECK! Call **1-800-352-3300** for more information, free samples, and full performance specifics.



TRIPANEL/CUSTOM

- ▲ Strong yet lightweight—just 1-1/2 lbs. per sq. ft.
- ▲ Can be fabricated with roto rocks
- ▲ Two sizes available from stock; custom sizes on special order
- ▲ Internal blocking available on special order

TRIDECK

- ▲ 4 ft. x 8 ft. panels, standard, weighing just 90 lbs. per panel
- ▲ 4 ft. x 10 ft. panels, available on special order
- ▲ Supports up to 100 lbs. per sq. ft. with L/360 deflection on 8 ft. unsupported span, meets FHA requirements



TRICEL HONEYCOMB CORP.

2100 Swanson Court, Gurnee, IL 60031 • In Illinois: 847-336-1321 • Fax: 847-336-1311


www.tricelcorp.com • 800-352-33300

Tricel Trideck

Trideck is a versatile composite panel faced with 3/8" exterior A-C plywood laminated to 2-1/2" phenolic impregnated structural grade Tricel Honeycomb.

The enclosed sample (less framing lumber) and specifications illustrate the product and provide performance data for Trideck. Trideck, when supported by a structural system, will afford the custom exhibit builder an efficient, light weight, cost effective system capable of saving the client thousands of dollars in transportation, storage, installation and dismantling costs each time the exhibit is used. Because Trideck is designed to carry a given load over a longer span than conventional construction, structural supports can be reduced to a minimum.

We are available to furnish you with an engineering opinion to solve any design requirement. This can be done on an individual basis by faxing us those requirements and a sketch of the double-deck layout to 847-336-1311.

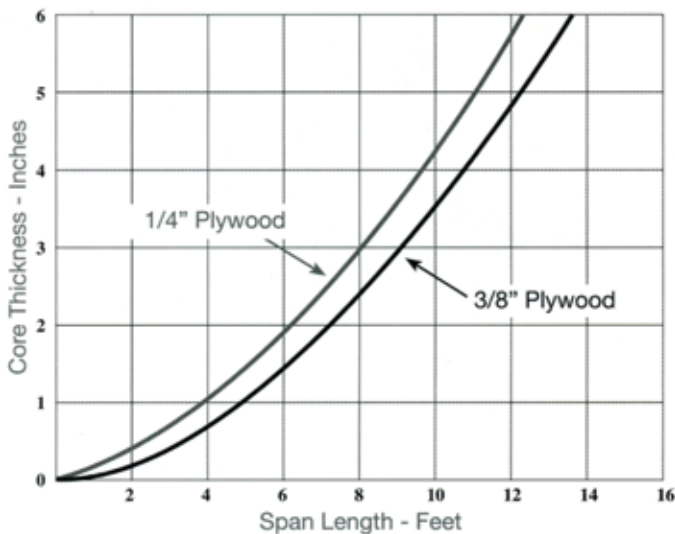

CORE THICKNESS VERSUS SPAN - PLYWOOD FACINGS

Core Material - 3/8" - 60-60 - 15%
Uniform Load - 40 lbs. / sq. ft.
Panel Width - 4 ft.
Panel Deflection - $L / 360$ th Span
Panel Weight - 4'x8'-90#, 4'x10'-110#

Trideck

Things you should know...


Panel Size - 4'x8' (nominal size). Other sizes available on special order.

Loading - 40#sq. ft. with a deflection 1/4" on an 8' span, 1/3" on a 10' span. This in accordance with FHA requirements.

Support System - Can be constructed of aluminum, fiberglass, wood or steel. Structural members need only be on 8' or 10' centers for a 40#/sq. ft. live load.

Attachments- Panels are furnished with a 1-1/2" wood perimeter frame to accommodate installation of cam locks and/or dowel pins (not furnished). Although connection of panels to each other is not required, Tricel will install Norse type cam locks for an additional charge.

Engineering data available on request.

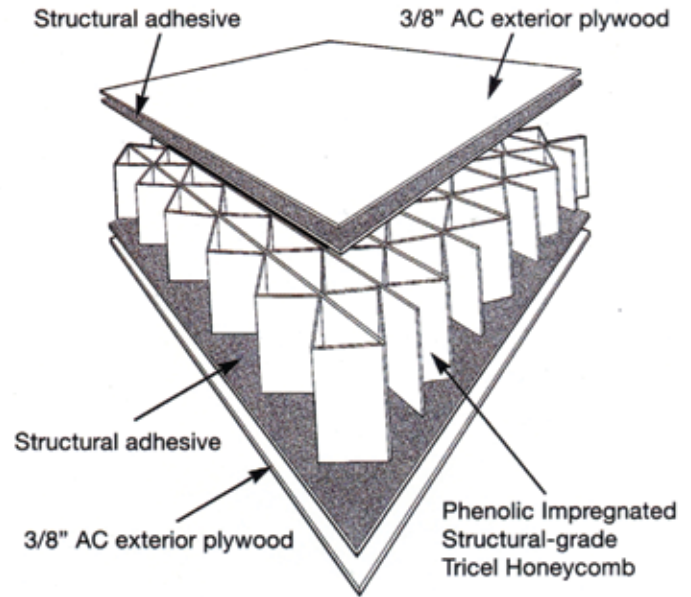

Tripanel Custom

Things you should know...

AVAILABLE SIZES: 48 x 96 x 1.560 (52#)
39 x 96 x 1.560 (42#)

CONSTRUCTION: 1/8" HARDBOARD
6/4" POPLAR FRAMING (4 SIDES)
3/8" CELL TRICEL HONEYCOMB

CORE

NORSE CAM LOCK INSTALLATION AVAILABLE
SPECIAL SIZES AVAILABLE (MINIMUMS APPLY)
LEAD TIME: AVAILABLE FROM STOCK

2-SIDED PANEL

- Cut square, ready for finishing, ie.: paint, wallpaper, fabric covering, graphic application, HPL, or slat wall
- Buying pre-made panels allows in-house people to use their time and talents to do more profitable work
- Buying pre-made panels is faster and more efficient

FOR FURTHER INFORMATION CONTACT:

TRICEL HONEYCOMB, 2100 Swanson Ct., Gurnee, IL 60031
847-336-1321 • FAX: 847-336-1311 • 800-352-3300
www.tricelcorp.com